


Banderola luminosa cantos redondos

Guía de tamaños


Tamaño	Medidas (mm)		Peso (kg)
	Ancho x alto	Separación	
40 x 40	400 x 400	165	2,10
50 x 50	500 x 500	265	2,70
60 x 60	600 x 600	345	3,40
70 x 30	700 x 300	*	2,30
70 x 40	700 x 400	155	2,95
70 x 50	700 x 500	255	3,30
70 x 70	700 x 700	450	4,10
100 x 40	1000 x 400	150	3,70
100 x 50	1000 x 500	240	4,2
100 x 60	1000 x 600	340	4,70

*Una única pata de 150 mm de longitud

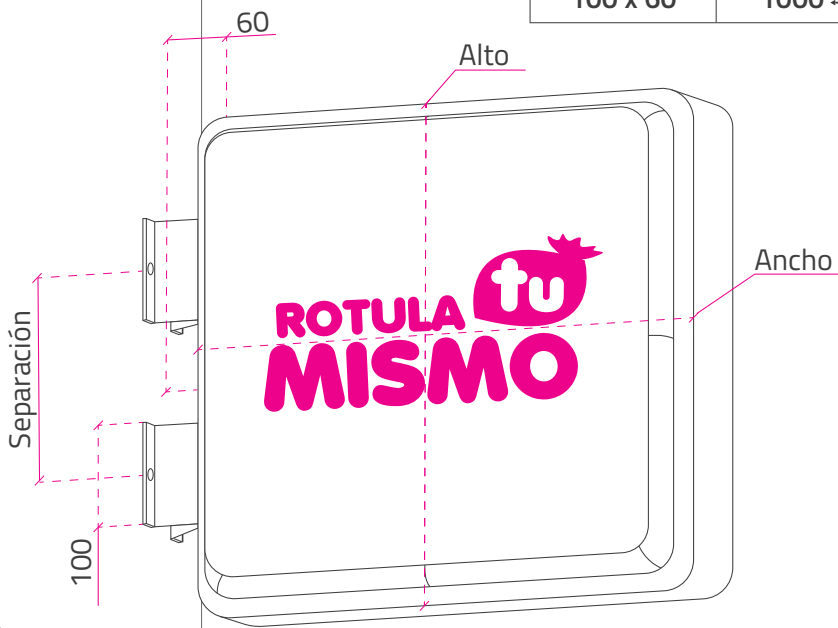

Especificaciones técnicas

Perfil Omega

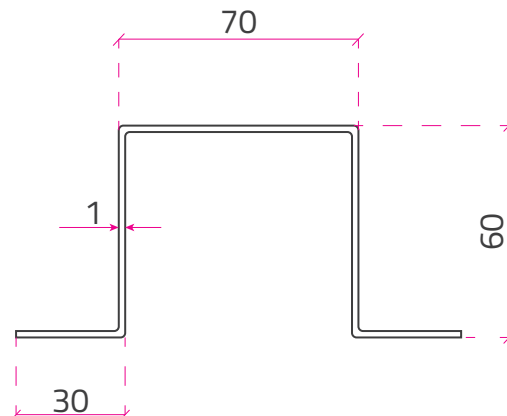


Cotas en mm

Banderola luminosa cantos redondos

Ficha técnica


Iluminación

Tamaño (cm)	Iluminación		
	Consumo (W)	F. luminoso (lm)	Eficiencia luminosa (lm/W)
40 x 40	9	726	80,67
50 x 50	12	968	80,67
60 x 60	12	968	80,67
70 x 30	12	968	80,67
70 x 40	15	1210	80,67
70 x 50	15	1210	80,67
70 x 70	15	1210	80,67
100 x 40	15	1210	80,67
100 x 50	18	1452	80,67
100 x 60	18	1452	80,67

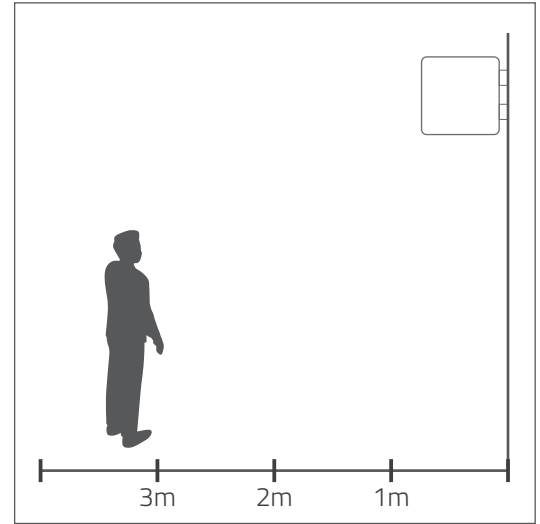

Supuesto de medición

Tamaño (cm)	Iluminación					
	Iluminancia (lx)			Luminancia (cd/m²)		
	1m	2m	3m	1m	2m	3m
40 x 40	65	16	7	65	16	7
50 x 50	86	22	10	86	22	10
60 x 60	86	22	10	86	22	10
70 x 30	86	22	10	86	22	10
70 x 40	108	27	12	108	27	12
70 x 50	108	27	12	108	27	12
70 x 70	108	27	12	108	27	12
100 x 40	108	27	12	108	27	12
100 x 50	130	32	14	130	32	14
100 x 60	130	32	14	130	32	14



Especificaciones lumínicas

CE RoHS

Color	Voltaje (V)	Consumo (W)	Ángulo	IP	Medidas (mm)	F. luminoso (lm)
Blanco 6500k	DC 12V	1,5	10 x 65°	67	44 x 25 x 12	121

